

Langdo Led Lighting Co.,Limited

Professional Led Lighting Manufacturer
Catalogue 2020



Langdo Led Lighting is a professional Led Lighting manufacturer in China, which specializes in the development, production and marketing of Commercial Lighting, Industrial Lighting, Solar Lighting and Smart Lighting.

Since established in 2008, Company devote into design and produce high quality led lighting. product lines include: Solar Street Light, Solar Flood Light, Led Street Light, Flood Light, LED High Bay Light, Tri-Proof Light, Landscape light, etc.

After a ten years' fast development, by far we have a 2000 square meters R & D and production center and 3 assembly lines, Daily capacity reaches 120,000 pcs led lamps.

By the leading of the rich practical operating and high diathesis team in R&D, sales and management, We not only have got the license of ISO9001:2008 and ISO14001: 2004, and also we use the high efficiency ERP system for internal management.

This system make our order can be finished in time with high quality controlling. Under the high skills of the R&D team, All of our products have got various of certification , Such as: TUV, UL/ETL, DLC, FCC, CE,, ROHS, SAA, BIS, etc.

Presently, we export to more than 40 countries and regions, we have 3 sale branches and 10 distributors around the world. everyday all of them are working for a new world, to try our best to make the world more green and more sustainable.



Catalogue

01 Solar Street Light

02 LED Street Light

03 Solar Flood Light

04 LED Flood Light

05 LED High Bay Light

06 Stadium Light

Catalogue

07 Stadium Light/Square Light

08 LED Tri-Proof Light

09 Landscape Lighting

10 Others

11 Others

12 Others

Solar Street Light

All-In-One — A

Solar Panel: polycrystalline silicon

Battery: Lithium Iron Phosphate Battery



Control Term: Light Sensor+Radar Sensor+Switch

Lighting Mode: 100% Lumen when people approaches

10% Lumen after people leave

No Wire Connction, No AC power, No additional cost, No maintenance. No electricity Shock Risk.

Application: Village Road, Country road, Alley, Path, Rural, Factory, School, Gate, Residential, Gate, Square, area where lack of electricity

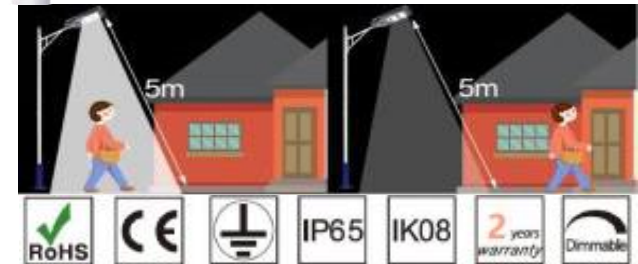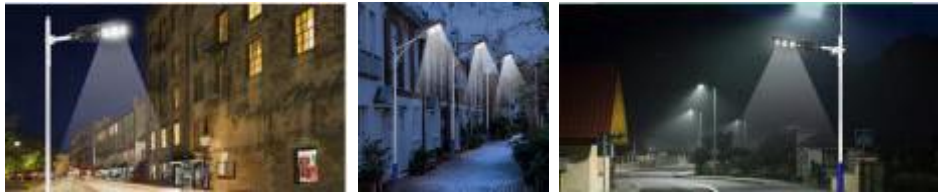

Model	Power	Solar Panel	Battery	Dimension	Luminous Efficiency	Housing Material	Mounted Height	Charging time	Working time	Sustain
LD-SSL030-A	30W	6V 7W	3.2V 4AH	375*187*46mm	120LM/W	ABS+Solar Panel	2-4meters	4-8hours	12-18hours	2-3 rainy days
LD-SSL060-A	60W	6V 10W	3.2V 8AH	466*208*46mm	120LM/W	ABS+Solar Panel	3-5meters	4-8hours	12-18hours	2-3 rainy days
LD-SSL090-A	90W	6V 14W	3.2V 12AH	606*223*46mm	120LM/W	ABS+Solar Panel	4-6meters	4-8hours	12-18hours	2-3 rainy days

All-In-One—B

Solar Panel: polycrystalline silicon

Battery: Lithium Iron Phosphate Battery

Material: Stamping Iron Shell + Solar panel

Control Term: Light Sensor+Radar Sensor+Switch

Lighting Mode: 100% Lumen when people approaches
10% Lumen after people leave

No Wire Connction, No AC power, No additional cost

No maintenance. No Electricity Shock Risk.

Application: Village Road, Country road, Alley, Path, Rural, Factory, School, Gate, Residential, Gate, Square, Any area where lack of electricity



20W



40W



60W

Model	Power	Solar Panel	Battery	Dimension	Luminous Efficiency	Mounted Height	Housing Material	Charging time	Working time	Sustain
LD-SSL020-B	20W	6V 8W	3.2V 5AH	215*46*375mm	120LM/W	2-4meters	Stamping Iron	4-8hours	12-18hours	2-3 rainy days
LD-SSL040-B	40W	6V 10W	3.2V 10AH	466*208*46mm	120LM/W	3-5meters	Stamping Iron	4-8hours	12-18hours	2-3 rainy days
LD-SSL060-B	60W	6V 13W	3.2V 15AH	215*46*585mm	120LM/W	4-6meters	Stamping Iron	4-8hours	12-18hours	2-3 rainy days

All-In-One —D

Solar Panel: polycrystalline silicon

Battery: Lithium Iron Phosphate Battery

Control Term: Light Sensor+Radar Sensor+Remote Controller

Lighting Mode: 100% Lumen when people approaches

30% Lumen after people leave

Others: optional with remote control, full light, half light,

Different light mode can be set as needed

No Wire Connction, No AC power, No additional cost

No maintenance. No Electricity Shock Risk.

Application: Village Road, Country road, Alley, Path, Rural, Factory, School, Gate, Residential, Gate, Square, Any area where lack of electricity, etc



Model	Power	Solar Panel	Battery	Dimension	Luminous Efficiency	Mounted Height	Housing	Charging time	Working time	Mounted	Sustain
LD-SSL030-D	30W	6V 10W	3.2V 6AH	450*210*60mm	120LM/W	2-3meters	Dia-cast AL	4-8hours	12-18hours	Wall/Pole	2-3 rainy days
LD-SSL060-D	60W	6V 12W	3.2V 12AH	550*220*65mm	120LM/W	3-4meters	Dia-cast AL	4-8hours	12-18hours	Wall/Pole	2-3 rainy days
LD-SSL090-D	90W	6V 20W	3.2V 18AH	680*260*95mm	120LM/W	4-5meters	Dia-cast AL	4-8hours	12-18hours	Wall/Pole	2-3 rainy days

Solar Street Light

All-In-One — E

Solar Panel: polycrystalline silicon

Battery: Lithium Iron Phosphate Battery

Control Term: Light Sensor+Radar Sensor+Remote Controller

Lighting Mode: 100% Lumen when people approaches

10% Lumen after people leave


Pole size: Diameter 60mm, Length: 600mm, Base height: 120mm

Standard set: Lamp 1pc, Pole 1pc, Screw 1 set, Remote controller 1pc

No Wire Connction, No AC power, No additional cost

No maintenance. No Electricity Shock Risk.

Application: Village Road, Country road, Alley, Path, Rural, Factory, School, Gate, Residential, Gate, Square, Any area where lack of electricity, etc



Model	Power	Solar Panel	Battery	Dimension	Luminous Efficiency	Mounted Height	Housing	Charging time	Working time	Sustain
LD-SSL050-E	50W	6V 16W	3.2V 16AH	500*220*45mm	120LM/W	3-5meters	Aluminum Alloy	4-6hours	18-20hours	2-3 rainy days
LD-SSL100-E	100W	6V 20W	3.2V 32AH	700*220*45mm	120LM/W	4-6meters	Aluminum Alloy	4-6hours	18-20hours	2-3 rainy days
LD-SSL150-E	150W	6V 25W	3.2V 48AH	900*220*45mm	120LM/W	5-7meters	Aluminum Alloy	4-6hours	18-20hours	2-3 rainy days

Highway Solar Street Light

All-In-One— MH

Solar Panel: Single crystal photovoltaic

Battery: Ternary lithium battery

Material: Aluminium Alloy Shell + Solar panel

Control Term: Light Sensor+Radar Sensor+Switch

Factory standard working mode:

1-4 hours:100% power when people approaches

50% power after people leave

5-8 hours 70% power when people approaches

40% power after people leave

9-12 hours 60% power when people approaches

30% power after people leave

No Wire Connction, No AC power, No additional cost

No maintenance. No Electricity Shock Risk.

Application: Highway, Expressway, Main Road, Boulevard, Big Square, Municipal Roads, National Road, Promenade, etc



Model	Power	Solar Panel	Battery	Dimension	Mounted Height	Mounting Distance	Install the calibre of the hoop
LD-MH15	15W	18V 20W	12.6V 11AH	530*300*44mm	4-6meters	15meters	50-80mm
LD-MH25	25W	18V 30W	12.6V 15.4AH	755*300*44mm	4-6meters	15meters	60-100mm
LD-MH30	30W	18V 40W	12.6V 17.6AH	900*300*44mm	5-7meters	20meters	60-100mm
LD-MH40	40W	18V 50W	12.6V 17.6AH	765*370*44mm	5-7meters	20meters	60-100mm
LD-MH50	50W	18V 70W	12.6V 26.4AH	1135*300*44mm	6-8meters	20-25meters	60-100mm
LD-MH60	60W	18V 80W	12.6V 26.4AH	910*370*44mm	7-9meters	20-25meters	60-100mm
LD-MH80	80W	18V 100W	12.6V 50AH	1140*425*44mm	8-10meters	20-25meters	60-100mm
LD-MH100	100W	18V 130W	12.6V 60AH	1400*540*44mm	10-15meters	20-25meters	60-100mm
LD-MH120	120W	18V 150W	12.6V 80AH	1400*540*44mm	10-15meters	20-25meters	60-100mm

LED Street Light

LED Street Light —B

High power, high lumen > 100LM/W, high quality with 2 years warranty.

Easy to install and use, secure and reliable.

Light body is made of good quality aluminum with painting & anodic treatment on surface, exiguity and unique design, excellent heat dissipation.

Long life span > 50,000hours.

High brightness, low consumption, green for environment.

Built-in LED driver with IC ensure stability of light, it can work efficiently under AC85-265V in different countries and regions.

Potection grade IP65.

Application: Highway, Expressway, Main Road, Boulevard, Big Square, Municipal Roads, National Road, Promenade, etc



Model	Power	Voltage	Luminous Flux	Dimension	Beam Angle	Power	PF	Ctn Size	Warranty	Anti-surge voltage
LD-BJ50-B	50W	AC85-265V	100LM/W	500*230*80mm	90°/140°	1*50W COB	>0.95	53*24*9cm	2 years	4000V
LD-BJ100-B	100W	AC85-265V	100LM/W	620*260*80mm	90°/140°	1*50W COB	>0.95	63*27*11cm	2 years	4000V
LD-BJ150-B	150W	AC85-265V	100LM/W	720*280*80mm	90°/140°	1*50W COB	>0.95	75*30*12cm	2 years	4000V
LD-BJ200-B	200W	AC85-265V	100LM/W	950*330*80mm	90°/140°	1*50W COB	>0.95	97*36*12cm	2 years	4000V

LED Street Light

LED Street Light - 007

Brand COB led source, luminous efficiency 100LM/W,
110-120 LM/W available

Made of aluminum by integrated molding to finish, anti-corrosion, anti-cracking, rainproof design, not fading.

Tempered glass, translucent up to 98%, light effect evenly

Light body is made of good quality aluminum with painting & anodic treatment on surface, exiguity and unique design, excellent heat dissipation.

Built-in LED driver with IC ensure stability of light, it can work efficiently under AC85-265V in different countries and regions.

Potection grade IP65.

Application: Highway, Expressway, Main Road, Boulevard, Big Square, Municipal Roads, National Road, Promenade, etc



Model	Power	Voltage	Luminous Flux	Dimension	Beam Angle	Led Source	PF	Warranty	Anti-surge voltage
LD-SL-007-50W	50W	AC85-265V	100LM/W	490*260*75mm	90°/140°	1*50W COB	>0.95	2 years	4000V
LD-SL-007-100W	100W	AC85-265V	100LM/W	565*260*75mm	90°/140°	2*50W COB	>0.95	2 years	4000V
LD-SL-007-150W	150W	AC85-265V	100LM/W	710*260*75mm	90°/140°	3*50W COB	>0.95	2 years	4000V

LED Street Light —006

Brand 3030 led source, luminous efficiency 100LM/W, 110-120 LM/W available
Made of aluminum by integrated molding to finish, anti-corrosion, anti-cracking, rainproof design, not fading.
Tempered glass, translucent up to 98%, light effect evenly
Light body is made of good quality aluminum with painting & anodic treatment on surface, exiguity and unique design, excellent heat dissipation.
Long life span > 50,000hours.
Built-in LED driver with IC ensure stability of light, it can work efficiently under AC85-265V in different countries and regions.
Protection grade IP65.
Application: Highway, Expressway, Main Road, Boulevard, Big Square, Municipal Roads, National Road, Promenade, etc



Model	Power	Voltage	Luminous Flux	Dimension	Beam Angle	Led Source	PF	Warranty	Anti-surge voltage
LD-SL-006-30W	30W	AC85-265V	100LM/W	360*110*50mm	90°/140°	San'an 3030	>0.95	2 years	4000V
LD-SL-006-60W	60W	AC85-265V	100LM/W	410*120*50mm	90°/140°	San'an 3030	>0.95	2 years	4000V
LD-SL-006-90W	90W	AC85-265V	100LM/W	440*140*50mm	90°/140°	San'an 3030	>0.95	2 years	4000V
LD-SL-006-120W	120W	AC85-265V	100LM/W	600*160*60mm	90°/140°	San'an 3030	>0.95	2 years	4000V
LD-SL-006-150W	150W	AC85-265V	100LM/W	620*180*60mm	90°/140°	San'an 3030	>0.95	2 years	4000V

LED Street Light — 008

The lamp housing is made of aluminum die-casting design, strong impact resistance, the appearance is simple and generous

Unique Drain hole and heat emission hole, impervious of water, excellent heat dissipation performance

The power supply driver and the light source circuit are connected by a plug-in and pull-out special connector. installation and replacement are convenient and concise;
High quality led source, Bat wing lens for wider lighting cover Area, high luminous efficiency, low light decay, high color rendering, no flicker, long service life
Standard installation $\phi 60\text{mm}$, Installation and disassembly need not open cover design, easy operation.

Application: Highway, Expressway, Main Road, Boulevard, Big Square, Municipal Roads, National Road, Promenade, etc



Model	Power	Voltage	Luminous Flux	Dimension	Beam Angle	Led Source	PF	Warranty	Lamp post diameter
LD-SL-008-20W	20W	AC85-265V	100LM/W	410*120*50mm	Rotatable	San'an 3030	>0.95	3 years	<60mm
LD-SL-008-30W	30W	AC85-265V	100LM/W	440*150*50mm	Rotatable	San'an 3030	>0.95	3 years	<60mm
LD-SL-008-50W	50W	AC85-265V	100LM/W	475*180*50mm	Rotatable	San'an 3030	>0.95	3 years	<60mm
LD-SL-008-100W	100W	AC85-265V	100LM/W	600*255*50mm	Rotatable	San'an 3030	>0.95	3 years	<60mm
LD-SL-008-150W	150W	AC85-265V	100LM/W	715*255*50mm	Rotatable	San'an 3030	>0.95	3 years	<60mm

LED Street Light — 009

The lamp housing is made of aluminum die-casting design, strong impact resistance, the appearance is simple and generous

Unique Drain hole and heat emission hole, impervious of water, excellent heat dissipation performance

The power supply driver and the light source circuit are connected by a plug-in and pull-out special connector. installation and replacement are convenient and concise;

High quality led source, Bat wing lens for wider lighting cover Area, high luminous efficiency, low light decay, high color rendering, no flicker, long service life

Standard installation $\phi 60\text{mm}$, Installation and disassembly need not open cover design, easy operation.

Application: Highway, Expressway, Main Road, Boulevard, Big Square, Municipal Roads, National Road, Promenade, etc



Model	Power	Voltage	Luminous Flux	Dimension	Led Source	PF	Warranty	Lamp Post Diameter	Anti-surge Voltage
LD-SL-009-20W	20W	AC85-265V	100LM/W	315*128*76mm	San'an 3030	>0.95	2 years	<43mm	4000V
LD-SL-009-30W	30W	AC85-265V	100LM/W	351*142*76mm	San'an 3030	>0.95	2 years	<43mm	4000V
LD-SL-009-50W	50W	AC85-265V	100LM/W	405*166*79mm	San'an 3030	>0.95	2 years	<53mm	4000V
LD-SL-009-100W	100W	AC85-265V	100LM/W	484*211*83mm	San'an 3030	>0.95	2 years	<64mm	4000V
LD-SL-009-150W	150W	AC85-265V	100LM/W	580*242*83mm	San'an 3030	>0.95	2 years	<64mm	4000V

Solar Flood Light

Solar Flood Light — A

Solar Panel: Polycrystalline Silicon

Battery: Lithium Iron Phosphate Battery

Material: Die-cast aluminum housing + Electroplated reflector


Control Term: Light control + Time Control + remote control
(with remote controller)

IP Rating: IP65

No Electricity Shock, No wire connection, No additional cost

No maintenance cost, No AC power.

Application: Parking lots, Construction Site, Square, School, Park, Countryyard, Factory, etc



Model	Power	Solar Panel	Battery	Luminous Efficiency	Dimension	Lighting area	Charging Time	Lighting Time	Warranty
LD-SFL10-A	10W	6V 6W	3.2V 5AH	120LM/W	160*130*45mm	60 square meters	4-8 hours	12-18 hours	2 years
LD-SFL25-A	25W	6V 10W	3.2V 6AH	120LM/W	190*160*50mm	80 square meters	4-8 hours	12-18 hours	2 years
LD-SFL40-A	40W	6V 12W	3.2V 10AH	120LM/W	253*200*70mm	160 square meters	4-8 hours	12-18 hours	2 years
LD-SFL60-A	60W	6V 15W	3.2V 15AH	120LM/W	280*230*80mm	240 square meters	4-8 hours	12-18 hours	2 years
LD-SFL100-A	100W	6V 25W	3.2V 22AH	120LM/W	328*275*90mm	300 square meters	4-8 hours	12-18 hours	2 years
LD-SFL200-A	200W	6V 40W	3.2V 30AH	120LM/W	360*290*90mm	400 square meters	4-8 hours	12-18 hours	2 years

Top Solar Flood Light

Solar Flood Light —C

Solar Panel: Polycrystalline Silicon

Battery: Lithium Iron Phosphate Battery

Material: Die-cast aluminum housing + Electroplated reflector

Control Term: Light control + Time Control + remote control
(with remote controller)

IP Rating: IP65

No Electricity Shock, No wire connection, No additional cost



No maintenance cost, No AC power.

Application: Parking lots, Construction Site, Square, School, Park, Countryyard, Factory, Outdoor Party, Assembly. etc





Model	Power	Solar Panel	Battery	Dimension	Sustain Time	Wire	Lighting Time
LD-SFL060-C	120W	6V 15W	3.7V 13AH	350*350*17mm	3-4 rainy days	Standard 5 meters\1 square meter	Remote Controller 12H,8H,6H
LD-SFL120-C	120W	6V 20W	3.7V 18AH	350*435*17mm	3-4 rainy days	Standard 5 meters\1 square meter	Remote Controller 12H,8H,6H
LD-SFL180-C	180W	6V 25W	3.7V 26AH	350*510*17mm	3-4 rainy days	Standard 5 meters\1 square meter	Remote Controller 12H,8H,6H
LD-SFL240-C	240W	6V 45W	3.7V 46.8AH	510*610*25mm	3-4 rainy days	Standard 5 meters\1 square meter	Remote Controller 12H,8H,6H

Economical Led Flood Light




Model	Power	Voltage	CRI	BeamAngle	Lumen Output	Dimension	IP	Carton Size	Warranty
LD-FL010-A	10W	85-265V	≥70	120°	100LM/W	100*80*20mm	IP65	540*270*190mm	2 years
LD-FL020-A	20W	85-265V	≥70	120°	100LM/W	160*121*23mm	IP65	520*300*270mm	2 years
LD-FL030-A	30W	85-265V	≥70	120°	100LM/W	160*121*23mm	IP65	520*300*270mm	2 years
LD-FL050-A	50W	85-265V	≥70	120°	100LM/W	206*160*29mm	IP65	440*380*350mm	2 years
LD-FL100-A	100W	85-265V	≥70	120°	100LM/W	270*214*30mm	IP65	570*400*230mm	2 years
LD-FL150-A	150W	85-265V	≥70	120°	100LM/W	378*278*38mm	IP65	590*300*400mm	2 years
LD-FL200-A	200W	85-265V	≥70	120°	100LM/W	378*278*38mm	IP65	590*300*400mm	2 years




Model	Power	Voltage	CRI	BeamAngle	Lumen Output	Dimension	IP	Carton Size	Warranty
LD-FL010-B	10W	85-265V	≥70	120°	100LM/W	100*80*10mm	IP65	540*270*190mm	2 years
LD-FL020-B	20W	85-265V	≥70	120°	100LM/W	160*121*23mm	IP65	520*300*270mm	2 years
LD-FL030-B	30W	85-265V	≥70	120°	100LM/W	160*121*23mm	IP65	520*300*270mm	2 years
LD-FL050-B	50W	85-265V	≥70	120°	100LM/W	206*160*29mm	IP65	440*380*350mm	2 years
LD-FL100-B	100W	85-265V	≥70	120°	100LM/W	270*214*30mm	IP65	570*400*230mm	2 years
LD-FL150-B	150W	85-265V	≥70	120°	100LM/W	378*278*38mm	IP65	590*300*400mm	2 years
LD-FL200-B	200W	85-265V	≥70	120°	100LM/W	378*278*38mm	IP65	590*300*400mm	2 years

Economical Led Flood Light



Model	Power	Voltage	PF	Beam Angle	CRI	Luminous Flux	Dimension	IP	Carton Size	Warranty
LD-FL010-C	10W	85-265V	≥0.9	120°	≥80	100LM/W	95*66*30mm	IP65	600*250*290mm	2 years
LD-FL020-C	20W	85-265V	≥0.9	120°	≥80	100LM/W	130*95*30mm	IP65	500*280*390mm	2 years
LD-FL030-C	30W	85-265V	≥0.9	120°	≥80	100LM/W	170*130*30mm	IP65	550*330*270mm	2 years
LD-FL050-C	50W	85-265V	≥0.9	120°	≥80	100LM/W	225*160*30mm	IP65	430*380*320mm	2 years
LD-FL100-C	100W	85-265V	≥0.9	120°	≥80	100LM/W	260*195*30mm	IP65	430*340*130mm	2 years
LD-FL150-C	150W	85-265V	≥0.9	120°	≥80	100LM/W	310*220*32mm	IP65	520*440*130mm	2 years
LD-FL200-C	200W	85-265V	≥0.9	120°	≥80	100LM/W	360*260*33mm	IP65	480*390*130mm	2 years



Green lighting Tunnel lighting Bridge lighting



Model	Power	Voltage	LED	Beam Angle	CRI	Luminous Flux	Dimension	IP	Carton Size	Waranty
LD-FL050-D	50W	85-265V	2835	120°	≥80	100LM/W	205*175*52mm	IP65	560*370*220mm	2 years
LD-FL100-D	100W	85-265V	2835	120°	≥80	100LM/W	245*215*55mm	IP65	450*300*260mm	2 years
LD-FL150-D	150W	85-265V	2835	120°	≥80	100LM/W	305*260*65mm	IP65	415*270*320mm	2 years
LD-FL200-D	200W	85-265V	2835	120°	≥80	100LM/W	375*315*90mm	IP65	475*325*390mm	2 years
LD-FL300-D	300W	85-265V	2835	120°	≥80	100LM/W	375*315*90mm	IP65	475*325*390mm	2 years
LD-FL400-D	400W	85-265V	2835	120°	≥80	100LM/W	495*445*100mm	IP65	495*445*100mm	2 years



Economical High Bay Light



Model	Power	Voltage	LED	CRI	CCT.	LuminousFlux	Material	Dimension	IP Rating	Package	Warranty
LD-UF100-C10	100W	85-265V	3030	≥70	2700-7000K	100LM/W	AL+PC	Ø280mm*165mm	IP65	290*290*240mm	2 years
LD-UF150-C10	150W	85-265V	3030	≥70	2700-7000K	100LM/W	AL+PC	Ø350mm*165mm	IP65	390*390*250mm	2 years
LD-UF200-C10	200W	85-265V	3030	≥70	2700-7000K	100LM/W	AL+PC	Ø390mm*175mm	IP65	390*390*250mm	2 years



Model	Power	Voltage	LED	CRI	CCT	Luminous Flux	Material	Size	IP Rating	Package	Warranty
LD-UF100-C20	100W	85-265V	3030	≥70	2700-6500K	110LM/W	AL+PC	Ø320mm*150mm	IP65	370*370*210mm	2 years
LD-UF150-C20	150W	85-265V	3030	≥70	2700-6500K	110LM/W	AL+PC	Ø360mm*150mm	IP65	410*410*210mm	2 years
LD-UF200-C20	200W	85-265V	3030	≥70	2700-6500K	110LM/W	AL+PC	Ø400mm*170mm	IP65	450*450*210mm	2 years



Model	Power	Voltage	LED	CRI	CCT.	Luminous Flux	Material	Dimension	IP Rating	Package	Warranty
LD-UF050-D	50W	85-265V	3030	≥70	2700-6500K	100LM/W	AL+PC	Ø250*145mm	IP65	540*280*410mm	2 years
LD-UF100-D	100W	85-265V	3030	≥70	2700-6500K	100LM/W	AL+PC	Ø300*160mm	IP65	640*350*420mm	2 years
LD-UF150-D	150W	85-265V	3030	≥70	2700-6500K	100LM/W	AL+PC	Ø350*160mm	IP65	740*370*440mm	2 years
LD-UF200-D	200W	85-265V	3030	≥70	2700-6500K	100LM/W	AL+PC	Ø400*160mm	IP65	840*450*420mm	2 years

Top Flood Light B Series

Premium precise optical system, 2-10 times brighter than led light
High lighting effect, up to 95%
Anti-glare system, suitable for any occasion
Angle can be 10, 25, 40, 60, 90, 120 degree
Super slim body, easier for installation, and maintenance on single LED
Housing with PC+6063 pure aluminum material, very stable and strong
2 or 5 years warranty, and can be used for 10 years
Approved by DLC, ETL, SAA, TUV, CE, RoHS, ErP, C-Tick
Supported by IES, IP66, LM79, LM80



Model	Power	Voltage	Beam Angle	Luminous Efficiency	IP Rating	PF	Dimension	IP	Led Source	Driver	Warranty
LD-MFL050-B	50W	85-265V	120°	140LM/W	Ra.70	>0.95	315*87*212mm	IP65	Philips3030	Meanwell	5 years
LD-MFL100-B	100W	85-265V	120°	140LM/W	Ra.70	>0.95	315*177*212mm	IP65	Philips3030	Meanwell	5 years
LD-MFL150-B	150W	85-265V	120°	140LM/W	Ra.70	>0.95	315*267*212mm	IP65	Philips3030	Meanwell	5 years
LD-MFL200-B	200W	85-265V	120°	140LM/W	Ra.70	>0.95	315*357*212mm	IP65	Philips3030	Meanwell	5 years
LD-MFL300-B	300W	85-265V	120°	140LM/W	Ra.70	>0.95	315*537*212mm	IP65	Philips3030	Meanwell	5 years
LD-MFL400-B	400W	85-265V	120°	140LM/W	Ra.70	>0.95	631*375*212mm	IP65	Philips3030	Meanwell	5 years
LD-MFL500-B	500W	85-265V	120°	140LM/W	Ra.70	>0.95	631*471*212mm	IP65	Philips3030	Meanwell	5 years
LD-MFL600-B	600W	85-265V	120°	140LM/W	Ra.70	>0.95	631*567*212mm	IP65	Philips3030	Meanwell	5 years

Frequently Asked Questions

Q1: Are you a manufacturer ?

Answer: Yes, our factory located in Shenzhen and Zhongshan City, over 12 years manufacture experience and ISO quality management certificated.

Q2. Can I have a sample order for any lamp ?

Answer: Yes, sample order to test and check quality is welcomed. Mixed samples are acceptable.

Q3. How about the lead time ?

Answer: Sample order 3-7days, Bulk order: 10-20 days.

Q4. What about Payment?

Answer: Bank Transfer (TT), Paypal, Western Union. Wechat or Alipay is also acceptable if you have.

Q5. How do you ship the finished production ?

Answer: By express, Air freight or Ocean shipping according to your order quantity or your request.

Q6: Is it OK to print my logo or company info on lamp or package ?

A: We provide OEM service to all customers, we can help to make the label and color box according to your requirements.

Q7: How to proceed an order formally ?

Answer: 1) Please let us know your order details or your request on product parameter. 2)We will recommend products and solutions on the basis of your request. 3)Customers confirm order, release order and arrange to pay. 4)Factory start production after confirm the payment 5)Factory arrange the delivery after products finished.

Q8: How to deal with the defective?

Answer: All of our product are produced in strict quality control system, the defective rate is less than 0.2% according to our shipment records. if there is any defective during the warranty, please provide the picture or video first, we will ship the new lights to you within a few days or send it together with your next order.



01. PCB Testing



02. Assemble PCB and driver



03. Bonding wire/ wire solder



07. Aging test




08. Attach PC cover



09. Power test on completed fixture



04. Test on power



05. Glue filling on driver



06. Quality control



10. Inspection on appearance



11. Label



12. Package

Langdo Led Lighting Co.,Limited

Professional Led Lighting Manufacturer



Add: 208, No 92 Ruyi Road, Longgang District, Shenzhen City, Guangdong Province
China 518172

Email: sales@langdo-led.com WhatsApp: +86-13760319363

Wechat: Fobshenzhen www.langdo-led.com